



Refractive Power / Corneal Analyzer  
**OPD-Scan III** *VS*



THE ART OF EYE CARE




# Experience the Visual System

The OPD-Scan III VS is an aberrometer providing optimal and facilitated eyeglass prescription with detailed measurement data.

The easy-to-understand reports displayed on a tablet allow simple explanation of examination results.

This unit opens a variety of business possibilities as a new communication tool.

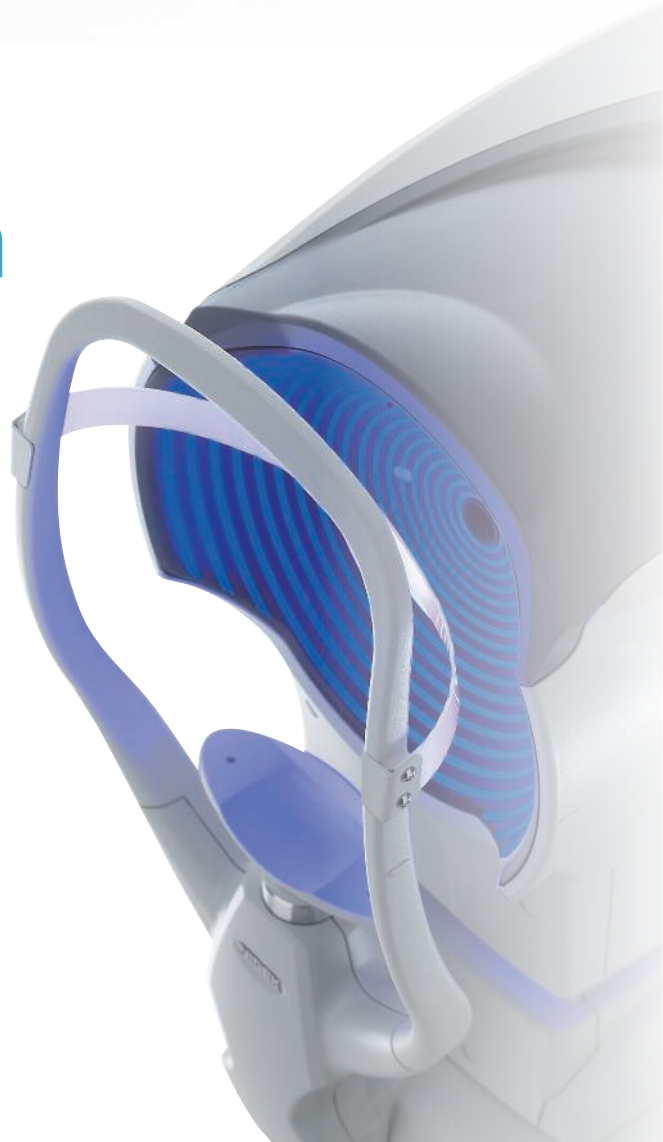

## Comprehensive Vision Analysis

OPD-Scan III VS is a device that mainly measures corneal shape (topographer) and refractive error (refractometer).

It clarifies causes of vision difficulties through wavefront analysis of information measured over a wide area.



### Wavefront Aberrometer

Unprecedented assessment of visual acuity and quality of vision.

### Auto Refractometer

Exceptionally accurate refraction for various pupil diameters even under photopic and mesopic conditions.

### Topographer

Intuitive maps and numerical data of the corneal surface.

### Auto Keratometer

Conventional keratometry and novel corneal surface descriptors.

### Pupillometer

Measurement of photopic and mesopic pupil diameters.

## Superior Examination with NIDEK RT

By communicating with NIDEK RT, the high quality measurement and fast examination provide for an even more enhanced experience. The report image can be displayed on the large control console screen of the RT-6100.






# Solutions for Face-to-face Consulting

Tablet viewer provides four kinds of easy-to-understand reports for explanation and consulting.




## Basic Information Report

Basic information to generally judge the patient's eye conditions.

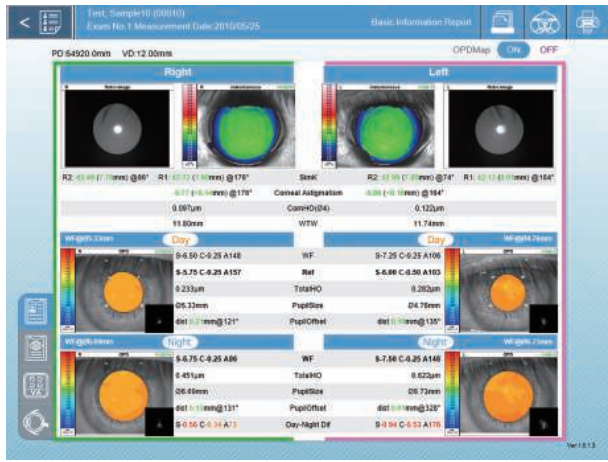

## Topography Report

Intuitive maps and numerical data for comprehending the corneal surface.

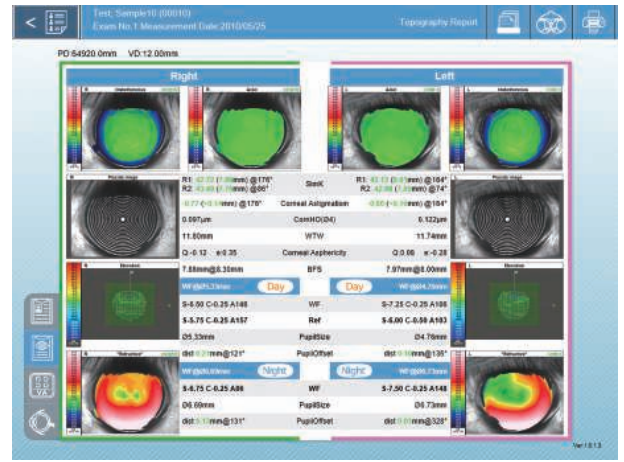


## Simulation Report

Visual performance simulations and MTF graphs for a variety of conditions.




## Eye Diagram Image Report


Eye model to visually understand eye conditions ranging from eye fundus to cornea.

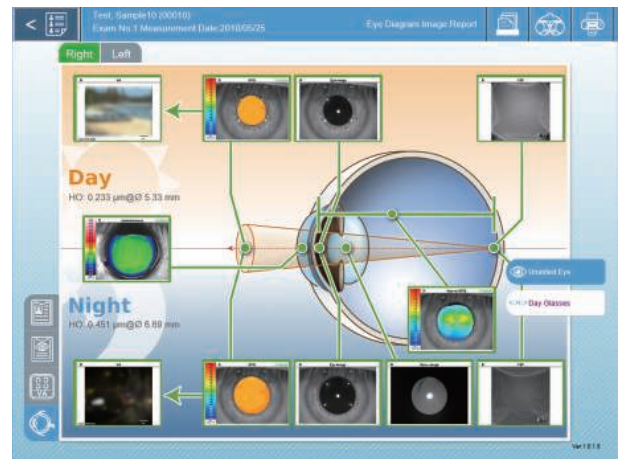


# Wide Range of Display Patterns

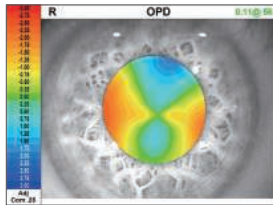


**OPD map**  
Distribution of refractive power

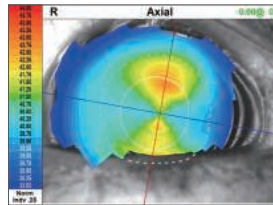


**Axial map**  
Distribution of corneal curvature radius / corneal refractive power

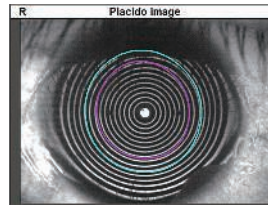


**Placido image**  
Placido ring image

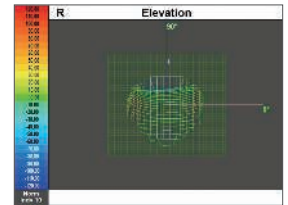


**Elevation map**  
Simulation of the difference in elevation between cornea and overlaid reference sphere

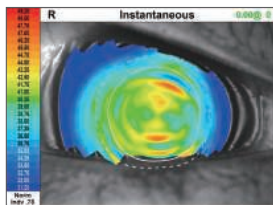


**Instantaneous map**  
Distribution of corneal curvature radius / corneal refractive power

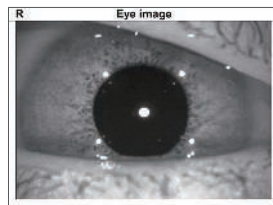


**Eye image**  
Image of anterior eye segment

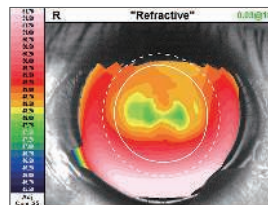


**"Refractive" map**  
Distribution of corneal surface refractive power

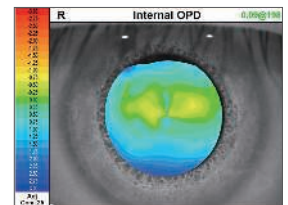


**Internal OPD map**  
Distribution of internal eye refractive error

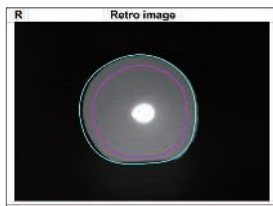


**Retro image**  
Retroillumination image

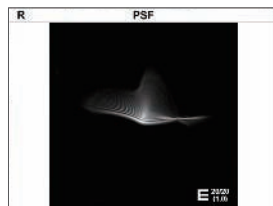


**PSF (Point Spread Function) map**  
Simulation of how the point-source light appears to the patient

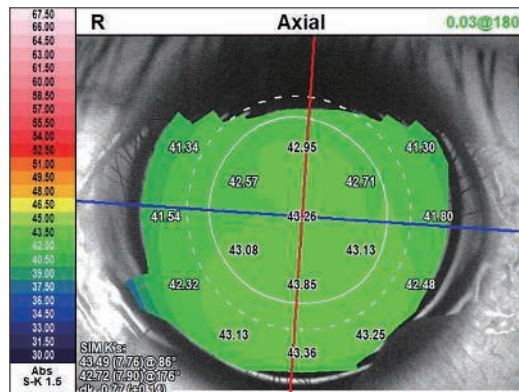

**Additional indication**  
Text and numerical data display on some maps for more detailed confirmation.

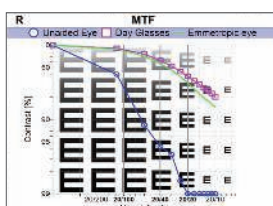

**MTF (Modulation Transfer Function) graph**  
Graph of contrast analysis

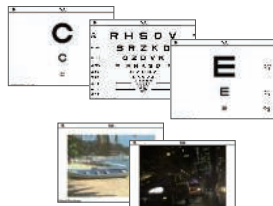

**VA (Visual Acuity) map**  
Simulation of how the VA chart appears to the patient  
\*Landolt/ETDRS/Snellen/Image charts are available.

## OPD-Scan III VS Specifications

Wavefront aberrometer	
Measurement principle	Automated objective refraction (dynamic skiascopy)
Spherical power range	-20.00 to +22.00 D
Cylindrical power range	0 to $\pm 12.00$ D
Axis range	0 to 180°
Measurement area	$\phi 2.0$ to 9.5 mm (7 zone measurement)
Data point	2,520 points (7 x 360)
Map type	OPD, Internal OPD, PSF, MTF graph, Visual Acuity
Topographer	
Measurement rings	33 vertical, 39 horizontal
Measurement area	$\phi 0.5$ to 11.0 mm (R = 7.9 mm)
Data point	11,880 points and more
Map type	Axial, Instantaneous, "Refractive", Elevation
Auto refractometer	
Measurement range	Sphere -20.00 to +22.00 D Cylinder 0 to $\pm 12.00$ D Axis 0 to 180°
Minimum measurable pupil diameter	$\phi 2.6$ mm
Auto keratometer	
Measurement range	Curvature radius 5.00 to 10.00 mm Refractive power 33.75 to 67.50 D (n = 1.3375) Astigmatism 0 to $\pm 12.00$ D Axis 0 to 180°
Measurement area	$\phi 3.3$ mm (R = 7.7 mm)
Pupillometer/Pupillographer	
Measurement diameter	1.0 to 10.0 mm
Image type	Photopic, Mesopic
Auto tracking	X-Y-Z directions
Display	10.4-inch color LCD touch screen
Printer	Built-in thermal type line printer for data print
Interface	RS-232C, LAN: 1 port each USB: 4 ports
Power supply	100 to 240 V AC 50/60 Hz
Power consumption	110 VA
Dimensions/Mass	284 (W) x 525 (D) x 533 (H) mm / 23 kg 11.2 (W) x 20.7 (D) x 21.0 (H)" / 51 lbs.
Standard accessories	Printer paper, Power cord, Dust cover, Chinrest paper, Fixing pins for chinrest paper, Spherical model eye, Touch pen, Touch pen stand, Ferrite core, Installation CD for OPD Web Viewer System, Installation manual for OPD Web Viewer System
Optional accessories	Communication cable, Eye Care card system, Barcode reader, Magnetic card reader

Product/model name: REFRACTIVE POWER / CORNEAL ANALYZER OPD-Scan III

Brochure and listed features of the device are intended for non-US practitioners.

Specifications may vary depending on circumstances in each country.

Specifications and design are subject to change without notice.

The tablet described in this brochure is not included or sold with the OPD-Scan III VS.



**HEAD OFFICE**  
(International Div.)  
34-14 Maehama,  
Hiroishi-cho, Gamagori,  
Aichi 443-0038, JAPAN  
TEL: +81-533-67-8895  
URL: www.nidek.com

**TOKYO OFFICE**  
(International Div.)  
3F Sumitomo Fudosan Hongo  
Bldg., 3-22-5 Hongo, Bunkyo-ku,  
Tokyo 113-0033, JAPAN  
TEL: +81-3-5844-2641  
URL: www.nidek.com

**NIDEK INC.**  
2040 Corporate Court,  
San Jose, CA 95131, U.S.A.  
TEL: +1-408-468-6400  
+1-800-223-9044  
(US Only)  
URL: usa.nidek.com

**NIDEK S.A.**  
Ecoparc,  
9 rue Benjamin Franklin,  
94370 Sucy En Brie,  
FRANCE  
TEL: +33-1-49 80 97 97  
URL: www.nidek.fr

**NIDEK TECHNOLOGIES S.R.L.**  
Via dell'Artigianato,  
6/A, 35020 Albignasego (Padova),  
ITALY  
TEL: +39 049 8629200/8626399  
URL: www.nidektechnologies.it

**NIDEK (SHANGHAI) CO., LTD.**  
Rm3205, Shanghai Multi  
Media Park, No.1027 Chang  
Ning Rd, Chang Ning District,  
Shanghai, CHINA 200050  
TEL: +86 021-5212-7942  
URL: www.nidek-china.cn

**NIDEK SINGAPORE PTE. LTD.**  
51 Changi Business Park  
Central 2, #06-14,  
The Signature 486066,  
SINGAPORE  
TEL: +65 6588 0389  
URL: www.nidek.sg

[Manufacturer]